


ALS15

Switching Power supply 15 Volt/21 W

- ▶ Power DC injector from 5 to 2500 MHz
- ▶ Ripple ≤ 30 mV
- ▶ Short circuit protected
- ▶ Over voltage and current protected
- ▶ Status LED
- ▶ Soft-start power-on

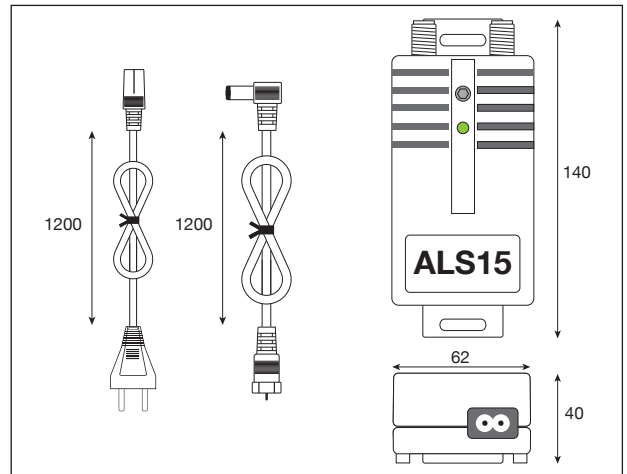

MADE IN ITALY

ARTICOLO	ALS15
INPUT RANGE	230 VAC $\pm 20\%$ 50/60Hz
OUTPUT VOLTAGE	15 VCC $\pm 2\%$
OUTPUT POWER	21 W
MAX OUTPUT CURRENT	1,4 A
NO-LOAD POWER CONSUMPTION	118mW @ 230V
EFFICIENCY	89% @ 230V
OUTPUT RIPPLE	≤ 30 mV @ 21W
RF DC INJECTOR BANDWIDTH	5... 2500 MHz
RF DC INJECTOR PASS THROUGH LOSS	$\leq 1,0$ dB
OPERATING TEMPERATURE RANGE	-10... +50 C°
AC INPUT INLET	IEC 320-C8
DC OUTLET	F Connector
AC INPUT POWER CORD	1.200 mm EURO PLUG - IEC 320-C8
DC OUTPUT POWER CORD	1.200 mm F FEMALE - BARREL ANGLE PLUG 2,1 X 9,5 mm
DIMENSIONS	140 X 62 X 40 mm

