


# AVM200E

# AVM200S

- ▶ Programmable DSB modulator 38,9...863,25 MHz
- ▶ Selectable TV standard PAL-SECAM B/G I D/K L/L'
- ▶ Adjustable output level 100 dB $\mu$ V (0/-20 dB)
- ▶ PLL frequency synthesis
- ▶ Dolby Surround systems compatible
- ▶ Built-in audio/video test generator
- ▶ Self-powered

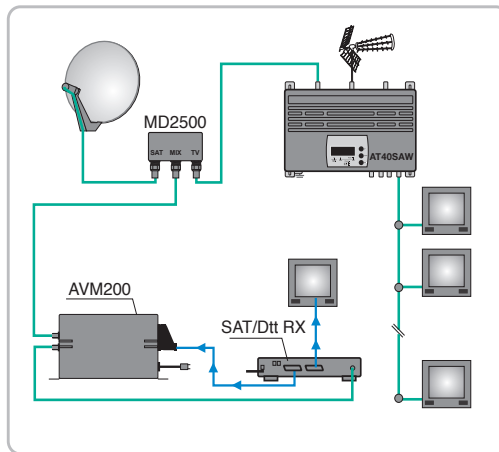

ITEM	AVM200E	AVM200S
OUTPUT LEVEL	100 $\pm$ 2 dB $\mu$ V	100 $\pm$ 2 dB $\mu$ V
GAIN ADJUSTER	0/-20 dB	0/-20 dB
INPUT/OUTPUT FREQUENCY RANGE	5...2200 MHz	
THROUGH LOSS MIX	$\leq$ 2 dB 5...2200 MHz	
SPURIOUS IN THE CHANNEL	- 65 dB	
SPURIOUS IN THE BAND	- 50 dB	
AUDIO / VIDEO CONNECTOR TYPE	RCA	SCART
VIDEO INPUT LEVEL (ADJUSTABLE)	0,5...1,5 Vpp	
S/N RATIO	50 dB	
VIDEO INPUT IMPEDANCE	75 Ohm	
MODULATION DEPTH	78 %	
VIDEO MODULATION	AM	
AUDIO STEREO CARRIERS PAL B/G	-	5,5 MHz + 5,74218 MHz
AUDIO INPUT LEVEL (ADJUSTABLE)	0,15...3 Vpp	1,0 Vpp
PREEMPHASIS	50 $\mu$ S	
AUDIO FREQUENCY RANGE	40...15.000 Hz	
AUDIO DISTORTION	$\leq$ 0,5%	
MAINS VOLTAGE	230 VAC	
CONSUMPTION MAX.	4,5 VA	
DIMENSIONS	195x103x50 mm	
STANDARDS	PAL B/G-I-D/K SECAM L/L'	