

# KITAS44/20


- ▶ IF-SAT 4 ways headend amplifier
- ▶ Gain adjuster for each input
- ▶ Fixed gain slope
- ▶ LNB powering from vertical high band input
- ▶ Plug for external power supply



Power supplier included

ITEM CODE		KITAS44/20
NUMBER OF IN/OUT		4 / 4
FREQUENCY BAND IF-SAT		950... 2200 MHz
GAIN AT 950 MHZ	dB	16
GAIN AT 2150 MHZ	dB	20
IF-SAT GAIN ADJUSTER	dB	0 / -12
OUTPUT LEVEL MAX.	dBμV*	117
NOISE FIGURE	dB	7
ISOLATION BETWEEN INPUTS	dB	> 28
ISOLATION BETWEEN OUTPUTS	dB	> 30
RETURN LOSS	dB	> 12
LNB POWERING	mA	Max 300 Vertical High Band
CONSUMPTION MAX.		190 mA 15V
DIMENSIONS	mm	80x71x27

\* CEI EN 50083-3 -35 dB IMA2

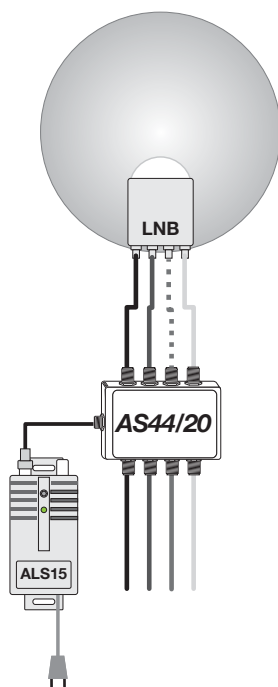

Percorso alimentazione LNB

