


IF - SAT LINE AMPLIFIERS




SCR COMPATIBILE
NORMA EN 50494

- ▶ Positive slope
- ▶ Low consumption
- ▶ Low noise figure
- ▶ SCR - UNICABLE systems compatible




Remote powered IF-SAT line amplifiers operate between 900 and 2.150 MHz and have a frequency response curve that compensates the typical coaxial cable loss. They are also compatible with one-cable distribution plants such as Unicable-SCR plants.

A2500

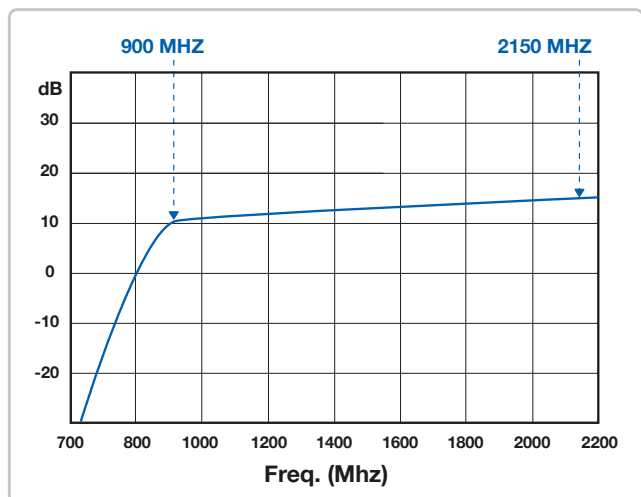

AS20

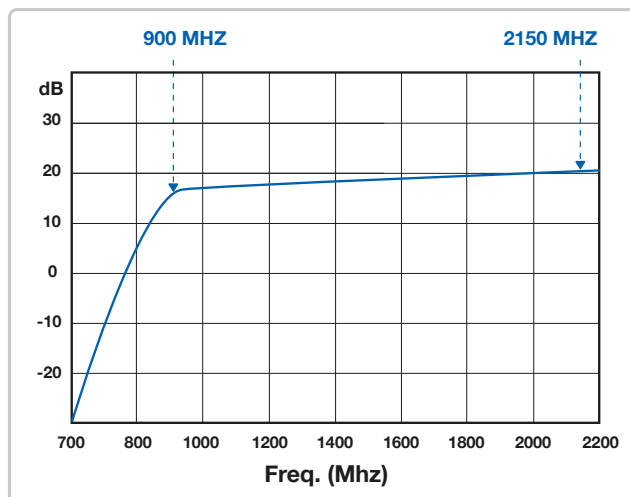

ITEM		A2500	AS20
FREQUENCY RESPONSE	MHz	900...2500	900...2500
GAIN AT 950 MHZ	dB	12	16
GAIN AT 2200 MHZ	dB	15	21
GAIN ADJUSTER	dB	-	0 / - 12
RETURN LOSS	dB	>12	
MAX. OUTPUT LEVEL	dBµV	100	110
CONSUMPTION MAX.	mA	25@18V	65@18V
LOAD MAX.	mA	500	