


MDW5/5

5-CABLE PASSIVE WIDE BAND TAPS

- ▶ 4 Wide Band trunk input 250... 2400 MHz
- ▶ Terrestrial trunk input 5... 790 MHz
- ▶ Low through loss
- ▶ High Isolation between inputs

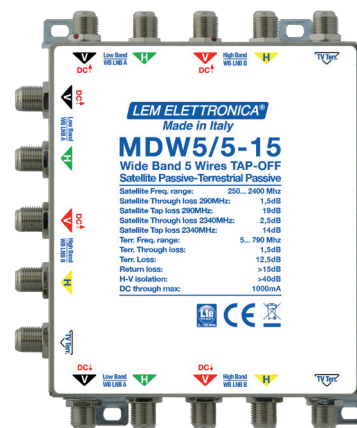

ARTICOLO		MDW5/5-10	MDW5/5-15	MDW5/5-20
FREQUENCY RANGE - SAT	MHz		250... 2400	
NUMBER OF INPUTS/OUTPUTS - SAT			4	
NUMBER OF TAPS - SAT		4	4	4
THROUGH LOSS - SAT	dB	2,5	2,5	2,5
TAP THROUGH LOSS - SAT	dB	10	15	20
FREQUENCY RANGE - TERRESTRIAL	MHz		5... 790	
NUMBER OF INPUTS/OUTPUTS - TERRESTRIAL			1	
NUMBER OF TAPS - TERRESTRIAL			1	
THROUGH LOSS - TERRESTRIAL	dB	3	1,5	1
TAP THROUGH LOSS - TERRESTRIAL	dB	8,5	12,5	17
CROSS POLAR V-H ISOLATION	dB		> 30	
RETURN LOSS	dB		> 10	
THROUGH VOLTAGE			VL + HL	
MAX CURRENT PER INPUT	mA		700	
DIMENSIONS	mm		118x140x30	

