




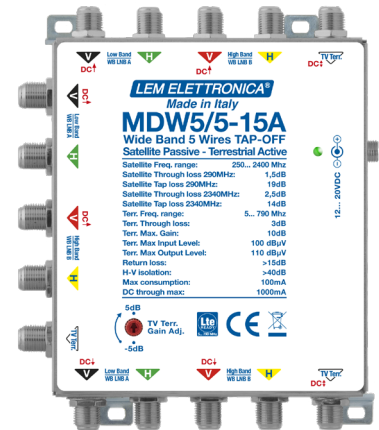


MDW5/5-15A

5 cable Wide Band taps with Active Terrestrial

-  **4 Wide Band lines from 250 to 2400 MHz**
-  **1 Terrestrial line 5 ...790MHz**
-  **Low loss of passage**
-  **High isolation between inputs**
-  **Supplied with power supply**





5
WARRANTY YEARS

MODEL	MDW5/5-15A	
SATELLITE FREQUENCY RANGE	MHz	250... 2400
SATELLITE INPUTS / OUTPUTS		4
SATELLITE TAPS		4
SATELLITE TRUNK LOSS	dB	≤ 2,5
SATELLITE TAP LOSS	dB	15
TV TERRESTRIAL FREQUENCY RANGE	MHz	5... 790
TV TERR. INPUT / OUTPUT		1
TV TERRESTRIAL TAP		1
TV TERRESTRIAL TRUNK LOSS	dB	1,5
TV TERRESTRIAL TAP GAIN ADJUSTABLE	dB	-5... 5
INPUTS / OUTPUTS ISOLATION	dB	> 30
RETURN LOSS	dB	> 10
VOLTAGE LINE		VL + HL
MAX. CURRENT PASS THROUGH	mA	1000
DIMENSIONS	mm	118x140x30

Connection Diagram

▶ Example of cascading a single satellite with **LNB Quattro** and mixing of terrestrial signals

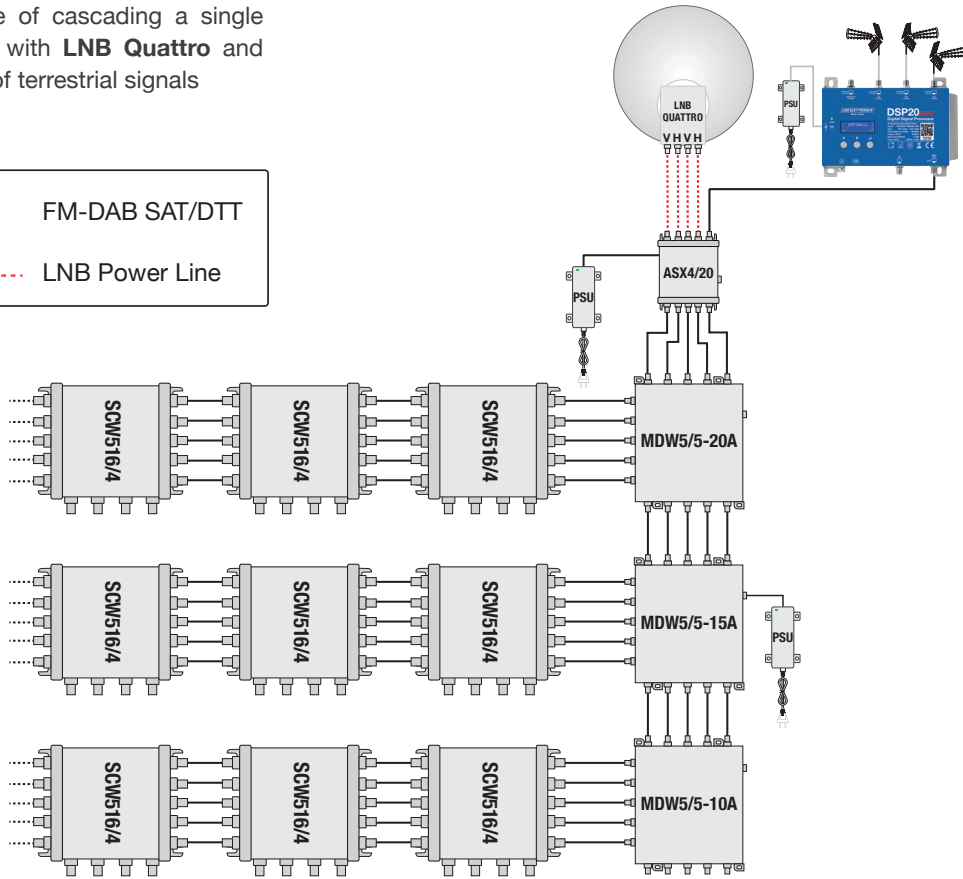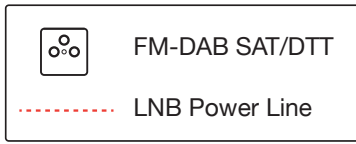

▶ Example of cascade distribution with two Wide Band LNBs for two satellites and mixing of terrestrial signals

