INS-dCSS SCR/dCSS DC injector



Low loss of passage

Suitable for SCR and dCSS multiswitches

Supplied with power supply



EM ELETTRONICA®




Current inserter suitable for SCR and dCSS multiswitches. Required to power multiswitches from the derived outputs when the power from the satellite decoder is insufficient.



MODEL		INS-dCSS
FREQUENCY RANGE	MHz	5 2200
THROUGH LOSS	dB	≤ 1
INS. MAX. CURRENT	mA	1000
DIMENSIONS	mm	58 x 56 x 27

Connection Diagram

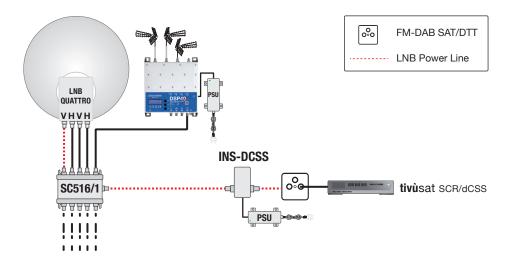

LEM ELETTRONICA srl

