






MDW5/5-15

5 cable Wide Band taps -15dB

-  **4 Wide Band lines from 250 to 2400 MHz**
-  **1 Terrestrial line 5 ...790MHz**
-  **Low loss of passage**
-  **High isolation between inputs**


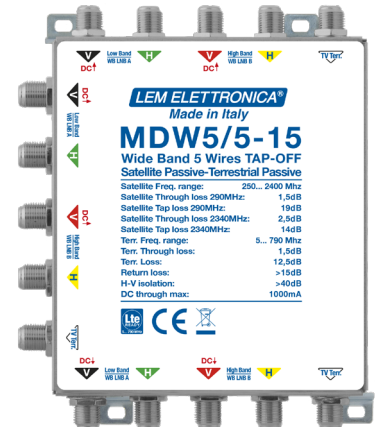


WARRANTY **5** YEARS

MODEL		MDW5/5-15
SATELLITE FREQUENCY RANGE	MHz	250... 2400
SATELLITE INPUTS / OUTPUTS		4
SATELLITE TAPS		4
SATELLITE TRUNK LOSS	dB	≤ 2,5
SATELLITE TAP LOSS	dB	15
TV TERRESTRIAL FREQUENCY RANGE	MHz	5... 790
TV TERR. INPUT / OUTPUT		1
TV TERRESTRIAL TAP		1
TV TERRESTRIAL TRUNK LOSS	dB	1,5
TV TERRESTRIAL TAP LOSS	dB	12,5
INPUTS / OUTPUTS ISOLATION	dB	> 30
RETURN LOSS	dB	> 10
MAX. CURRENT LINE VL + VH	mA	1000 + 1000
DIMENSIONS	mm	118x140x30

Connection Diagram

▶ Example of cascading a single satellite with **LNB Quattro** and mixing terrestrial signals

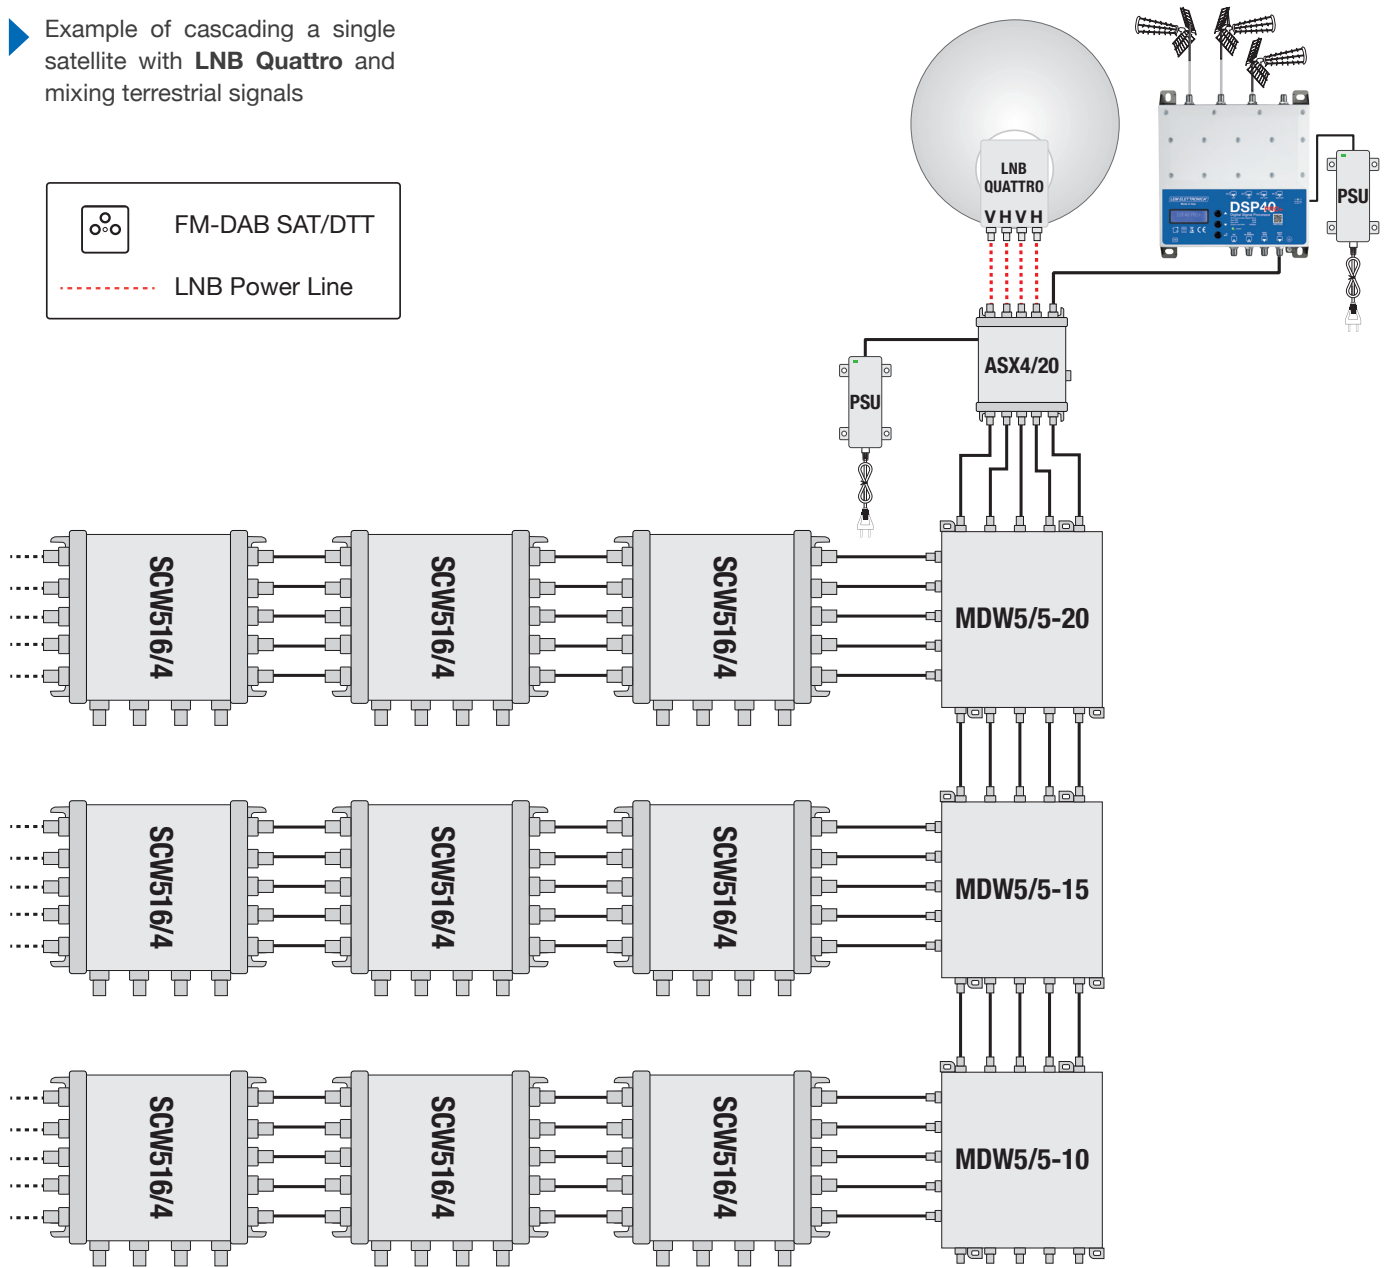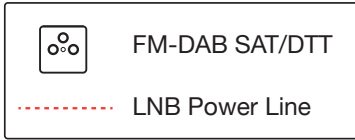

Connection Diagram

▶ Example of cascade distribution with two Wide Band LNBS for two satellites and mixing of terrestrial signals

