


ASX4/30


4-WAY IF-SAT AMPLIFIERS

- ▶ IF-SAT 4 ways headend amplifier - 30 dB
- ▶ Gain adjuster for each input
- ▶ Optimised gain slope
- ▶ Power save mode
- ▶ Selectable TV 0/12V for Terr. Remote power supply
- ▶ DC power input for external power supplier (ALS15 or AL15B)
- ▶ PSU Equipped

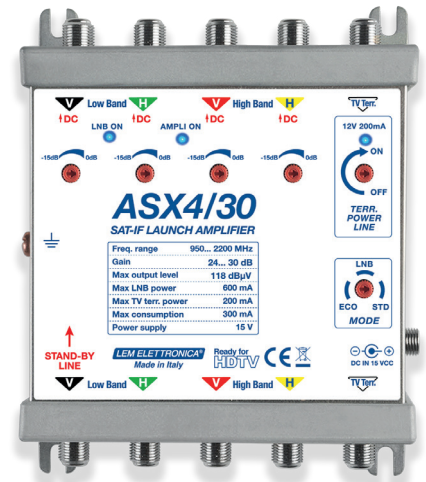


ITEM		ASX4/30
NUMBER OF IN/OUT		5 / 5
FREQUENCY BAND IF-SAT	MHz	950... 2200
GAIN @950 MHZ	dB	24
GAIN @2150 MHZ	dB	30
TV TERR. LOSS	dB	-0,5
IF-SAT GAIN ADJUSTER	dB	4 x 0/-15 dB
OUTPUT LEVEL MAX.	dB μ V	118
NOISE FIGURE	dB	\leq 7
ISOLATION BETWEEN INPUTS	dB	> 35
ISOLATION BETWEEN OUTPUTS	dB	> 35
RETURN LOSS	dB	> 12
QUATTRO-LNB POWERING		VL / HL / VH / HH (15V)
LNB POWER	mA	600mA total / 300mA single input
AMPLIFIER CONSUMPTION	mA	400mA@15V
TV TERR. REMOTE POWER		12V 200mA
DIMENSIONS	mm	138 X 108 X 38


POWER SAVE FUNCTION

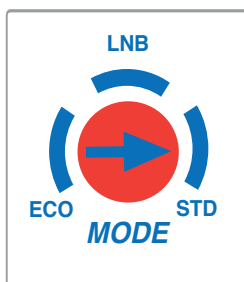

LNB = On
Ampli = On

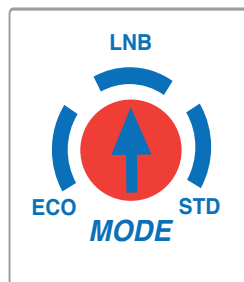

LNB = On
Ampli = Stand-By

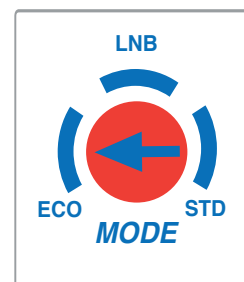

LNB = Stand-By
Ampli = Stand-By