








Series DR4

4-way vertical taps Band 5... 2.400Mhz

-  **DC pass between output and input.**
-  **High isolation between outputs**
-  **High performance with very low insertion loss**
-  **Installation in any junction box**
-  **Ready for wall mounting**
-  **Die-cast alloy body**

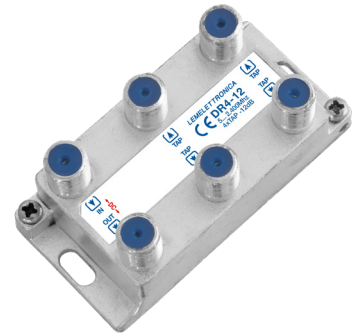

Wideband taps with F connectors. Available with different levels of attenuation on the tap outputs.

The products in this series are manufactured from die cast Zamak alloy to ensure high shielding and are fitted with a grounding screw.



MODEL		DR4-12	DR4-15	DR4-20	DR4-25
TAPS	n°	4	4	4	4
TAP LOSS					
5-40MHz	dB	12	15	20	25
40-1000MHz	dB	12	15	20	25
1000-2050MHz	dB	12	15	20	25
2050-2400MHz	dB	12	15	20	25
INSERTION LOSS (IN-OUT)					
5-40MHz	dB	4,2	3,5	2,0	2,0
40-1000MHz	dB	5,0	4,5	2,5	2,5
1000-2050MHz	dB	5,5	5,5	3	2,8
2050-2400MHz	dB	6,5	5,5	3,5	3
ISOLATION (OUT-TAP)					
5-40MHz	dB	18	18	18	18
40-1000MHz	dB	20	20	20	20
1000-2050MHz	dB	20	20	20	20
2050-2400MHz	dB	20	20	20	20
RETURN LOSS					
5-40MHz	dB	9	9	9	9
40-1000MHz	dB	10	10	10	10
1000-2050MHz	dB	10	10	10	10
2050-2400MHz	dB	10	10	10	10
GENERAL FEATURES					
IMPEDANCE	Ohm	75			
DIMENSIONS	mm	71x35x28	71x35x28	71x35x28	71x35x28