








Series DR6

6-way vertical taps Band 5... 2.400Mhz

-  **DC pass between output and input.**
-  **High isolation between outputs**
-  **High performance with very low insertion loss**
-  **Installation in any junction box**
-  **Ready for wall mounting**
-  **Die-cast alloy body**

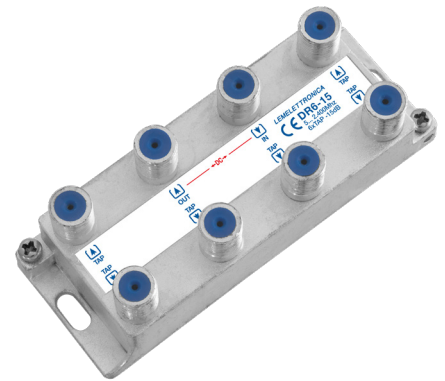

Wideband taps with F connectors. Available with different levels of attenuation on the tap outputs.

The products in this series are manufactured from die cast Zamak alloy to ensure high shielding and are fitted with a grounding screw.



MODEL		DR6-15	DR6-20
TAPS	n°	6	6
TAP LOSS			
5-40MHz	dB	15	20
40-1000MHz	dB	15	20
1000-2050MHz	dB	17	22
2050-2400MHz	dB	18	22
INSERTION LOSS (IN-OUT)			
5-40MHz	dB	4,5	3,5
40-1000MHz	dB	5,5	4
1000-2050MHz	dB	6,5	5
2050-2400MHz	dB	7,5	5,5
ISOLATION (OUT-TAP)			
5-40MHz	dB	18	18
40-1000MHz	dB	20	20
1000-2050MHz	dB	20	20
2050-2400MHz	dB	18	18
RETURN LOSS			
5-40MHz	dB	9	9
40-1000MHz	dB	10	10
1000-2050MHz	dB	11	11
2050-2400MHz	dB	10	10
GENERAL FEATURES			
IMPEDANCE	Ohm	75	
DIMENSIONS	mm	93x35x29	93x35x29