








# Series DR8

## 8-way vertical taps Band 5... 2.400Mhz

-  **DC pass between output and input.**
-  **High isolation between outputs**
-  **High performance with very low insertion loss**
-  **Installation in any junction box**
-  **Ready for wall mounting**
-  **Die-cast alloy body**

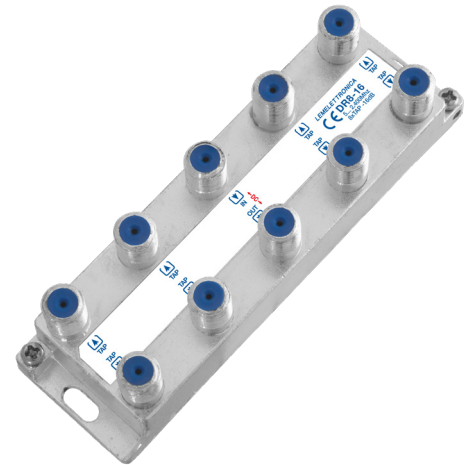

**Wideband taps with F connectors.** Available with different levels of attenuation on the tap outputs.

The products in this series are manufactured from die cast Zamak alloy to ensure high shielding and are fitted with a grounding screw.



MODEL		DR8-16	DR8-20
TAPS	n°	8	8
<b>TAP LOSS</b>			
5-40MHz	dB	16	20
40-1000MHz	dB	16	20
1000-2050MHz	dB	18	22
2050-2400MHz	dB	18	22
<b>INSERTION LOSS (IN-OUT)</b>			
5-40MHz	dB	4,5	3,5
40-1000MHz	dB	6	4
1000-2050MHz	dB	7	5
2050-2400MHz	dB	7,5	5,5
<b>ISOLATION (OUT-TAP)</b>			
5-40MHz	dB	18	18
40-1000MHz	dB	20	20
1000-2050MHz	dB	20	20
2050-2400MHz	dB	18	18
<b>RETURN LOSS</b>			
5-40MHz	dB	8	9
40-1000MHz	dB	10	10
1000-2050MHz	dB	11	11
2050-2400MHz	dB	10	10
<b>GENERAL FEATURES</b>			
IMPEDANCE	Ohm	75	
DIMENSIONS	mm	115x35x30	115x35x30