








SP8

8-way vertical splitter Band 5... 2.400Mhz

-  **DC pass through on all outputs**
-  **High isolation between outputs**
-  **High performance with very low insertion loss**
-  **Installation in any junction box**
-  **Ready for wall mounting**
-  **Die-cast alloy body**

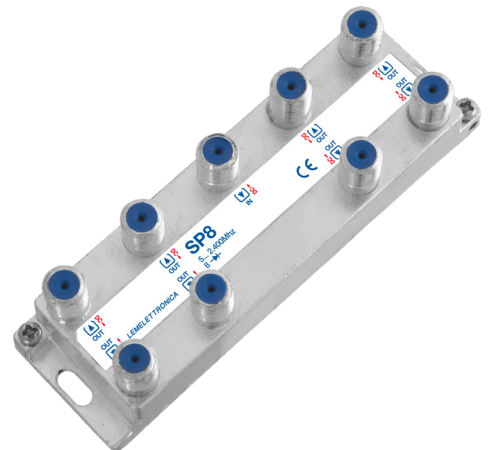

Wideband splitter with F-connectors.

The **DC pass** from the outputs to the input is directional thanks to **internal diodes**.

The products in this series are manufactured from die cast Zamak alloy to ensure maximum immunity to environmental interference.

WARRANTY **5** YEARS

MODEL		SP8
OUTPUTS	n°	8
INSERTION LOSS (IN-OUT)		
5-40MHz	dB	12,5
40-1000MHz	dB	13,5
1000-2050MHz	dB	17,5
2050-2400MHz	dB	18,5
ISOLATION (OUT-OUT)		
5-40MHz	dB	20
40-1000MHz	dB	18
1000-2050MHz	dB	18
2050-2400MHz	dB	20
RETURN LOSS		
5-40MHz	dB	9
40-1000MHz	dB	12
1000-2050MHz	dB	12
2050-2400MHz	dB	10
GENERAL FEATURES		
IMPEDANCE	Ohm	75
DIMENSIONS	mm	115x35x30