







HS444-16

4 cable legacy multiswitch -16dB

-  LNB powering from decoder
-  Through loss $\leq 1\text{dB}$
-  Max. consumption $\leq 35\text{mA}$
-  Support for wall fixing
-  Compact size




5
WARRANTY YEARS

Ready for
UHD TV

ENERGY SAVING
Stand-by mode

MODEL		HS444-16
MODEL		CASCADABLE
INPUTS / OUTPUTS		4 / 4
TAPS		4
MAX LEVEL IF-SAT INPUT	dB μ V	106
IF-SAT THROUGH LOSS	dB	≤ 1
TAP LOSS	dB	-16
INPUTS ISOLATION	dB	> 35
INPUT / OUTPUT ISOLATION	dB	> 30
RETURN LOSS	dB	> 12
TAP CONSUMPTION	mA	35
LNB MAX CURRENT	mA	300
DIMENSIONS	mm	90 x 72 x 28

Connection Diagram

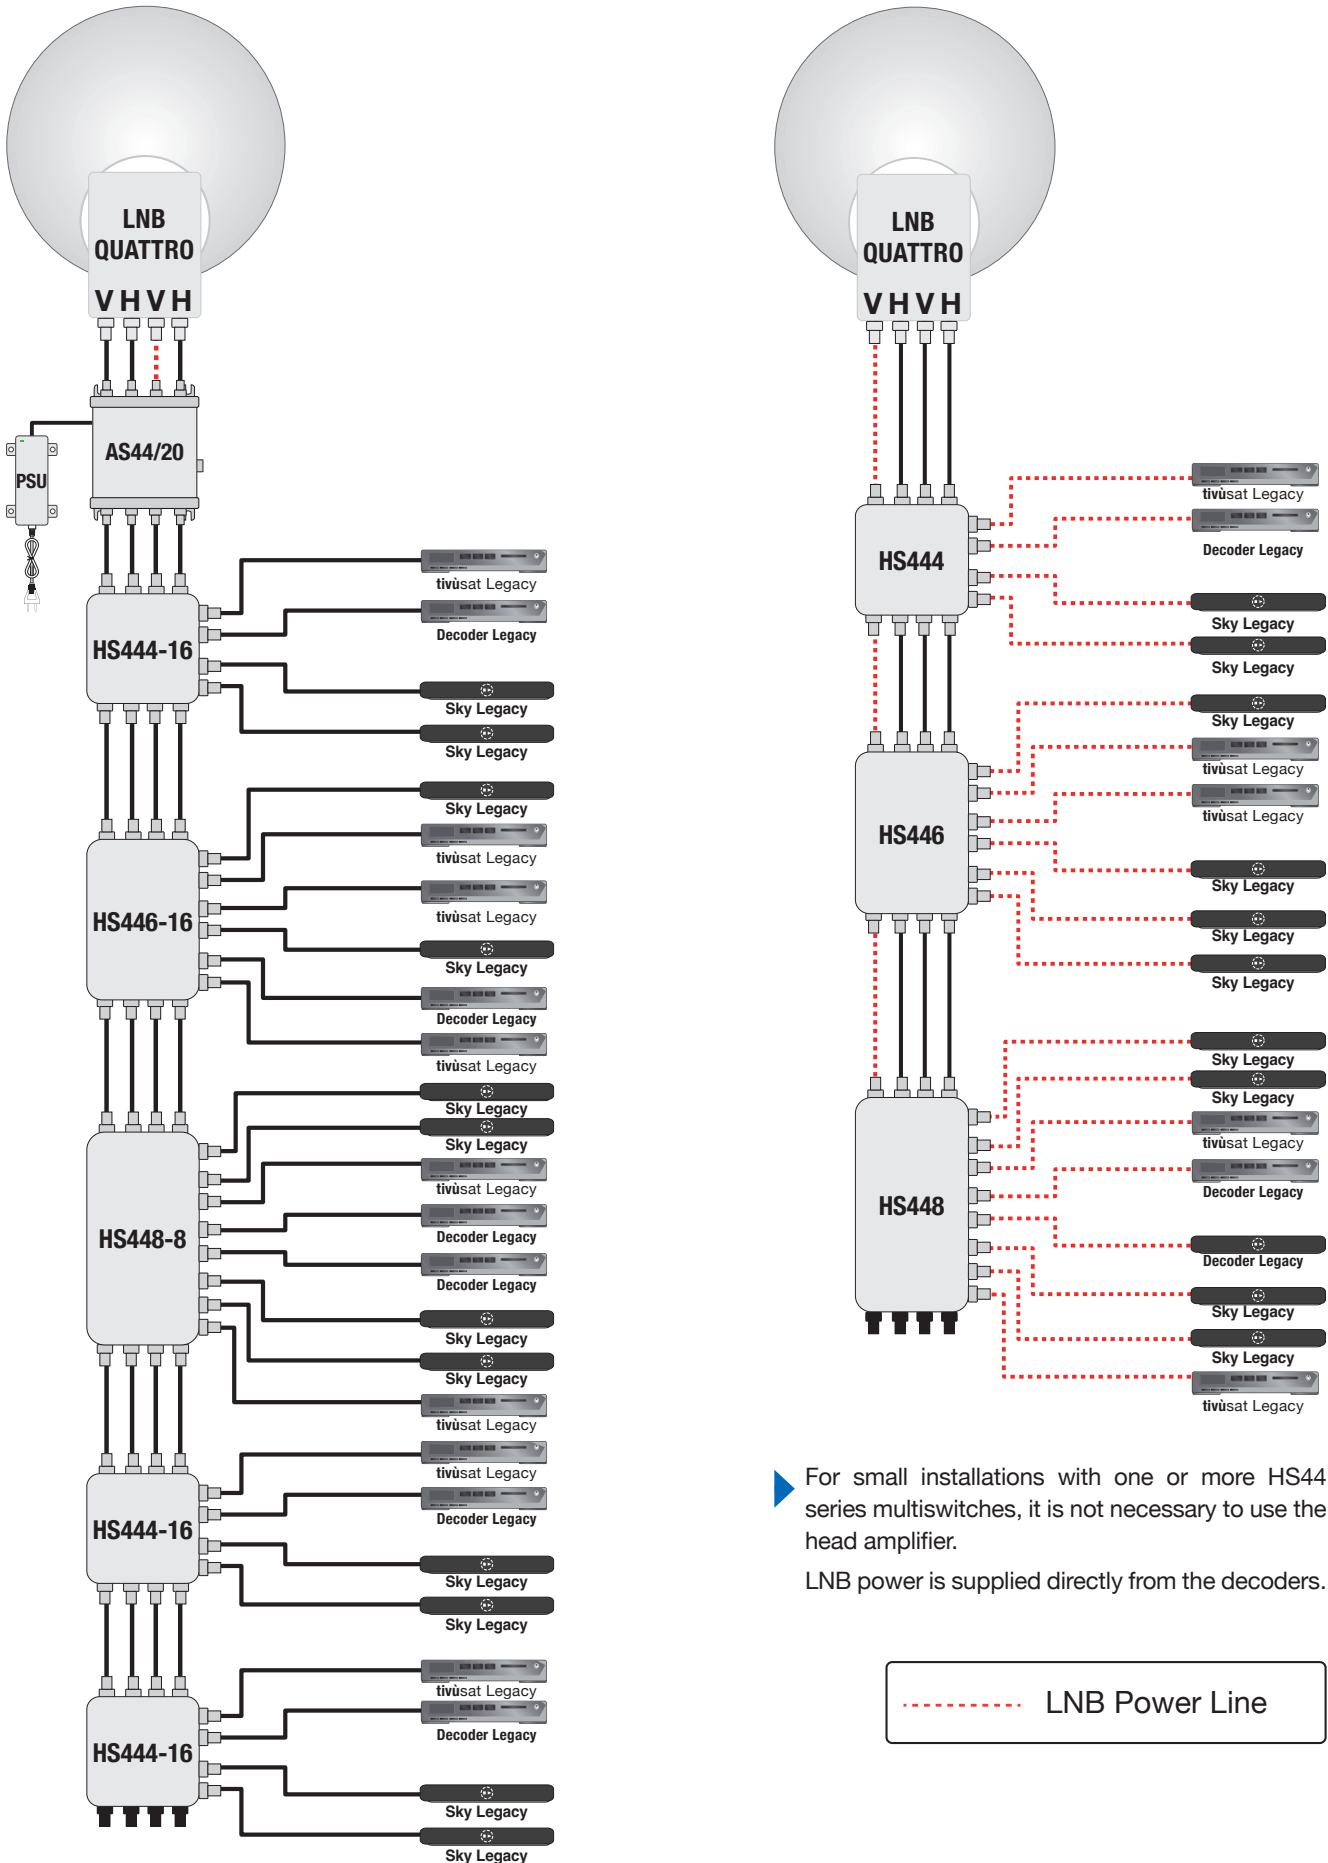

▶ For small installations with one or more HS44 series multiswitches, it is not necessary to use the head amplifier.

LNB power is supplied directly from the decoders.

----- LNB Power Line

