

# HS448

## 8 cable legacy multiswitch

- LNB powering from decoder
- Through loss  $\leq 3\text{dB}$
- Max. consumption  $\leq 35\text{mA}$
- Support for wall fixing
- Compact size




**5**  
WARRANTY YEARS

Ready for  
**UHDTV**

ENERGY  SAVING  
Stand-by mode

MODEL		HS448
MODEL		CASCADABLE
INPUTS / OUTPUTS		4 / 4
TAPS		8
MAX LEVEL IF-SAT INPUT	dB $\mu$ V	90
IF-SAT THROUGH LOSS	dB	$\leq 3$
TAP GAIN	dB	0
INPUTS ISOLATION	dB	$> 35$
INPUT / OUTPUT ISOLATION	dB	$> 30$
RETURN LOSS	dB	$> 12$
TAP CONSUMPTION	mA	35
LNB MAX CURRENT	mA	300
DIMENSIONS	mm	147 x 72 x 28

# Connection Diagram

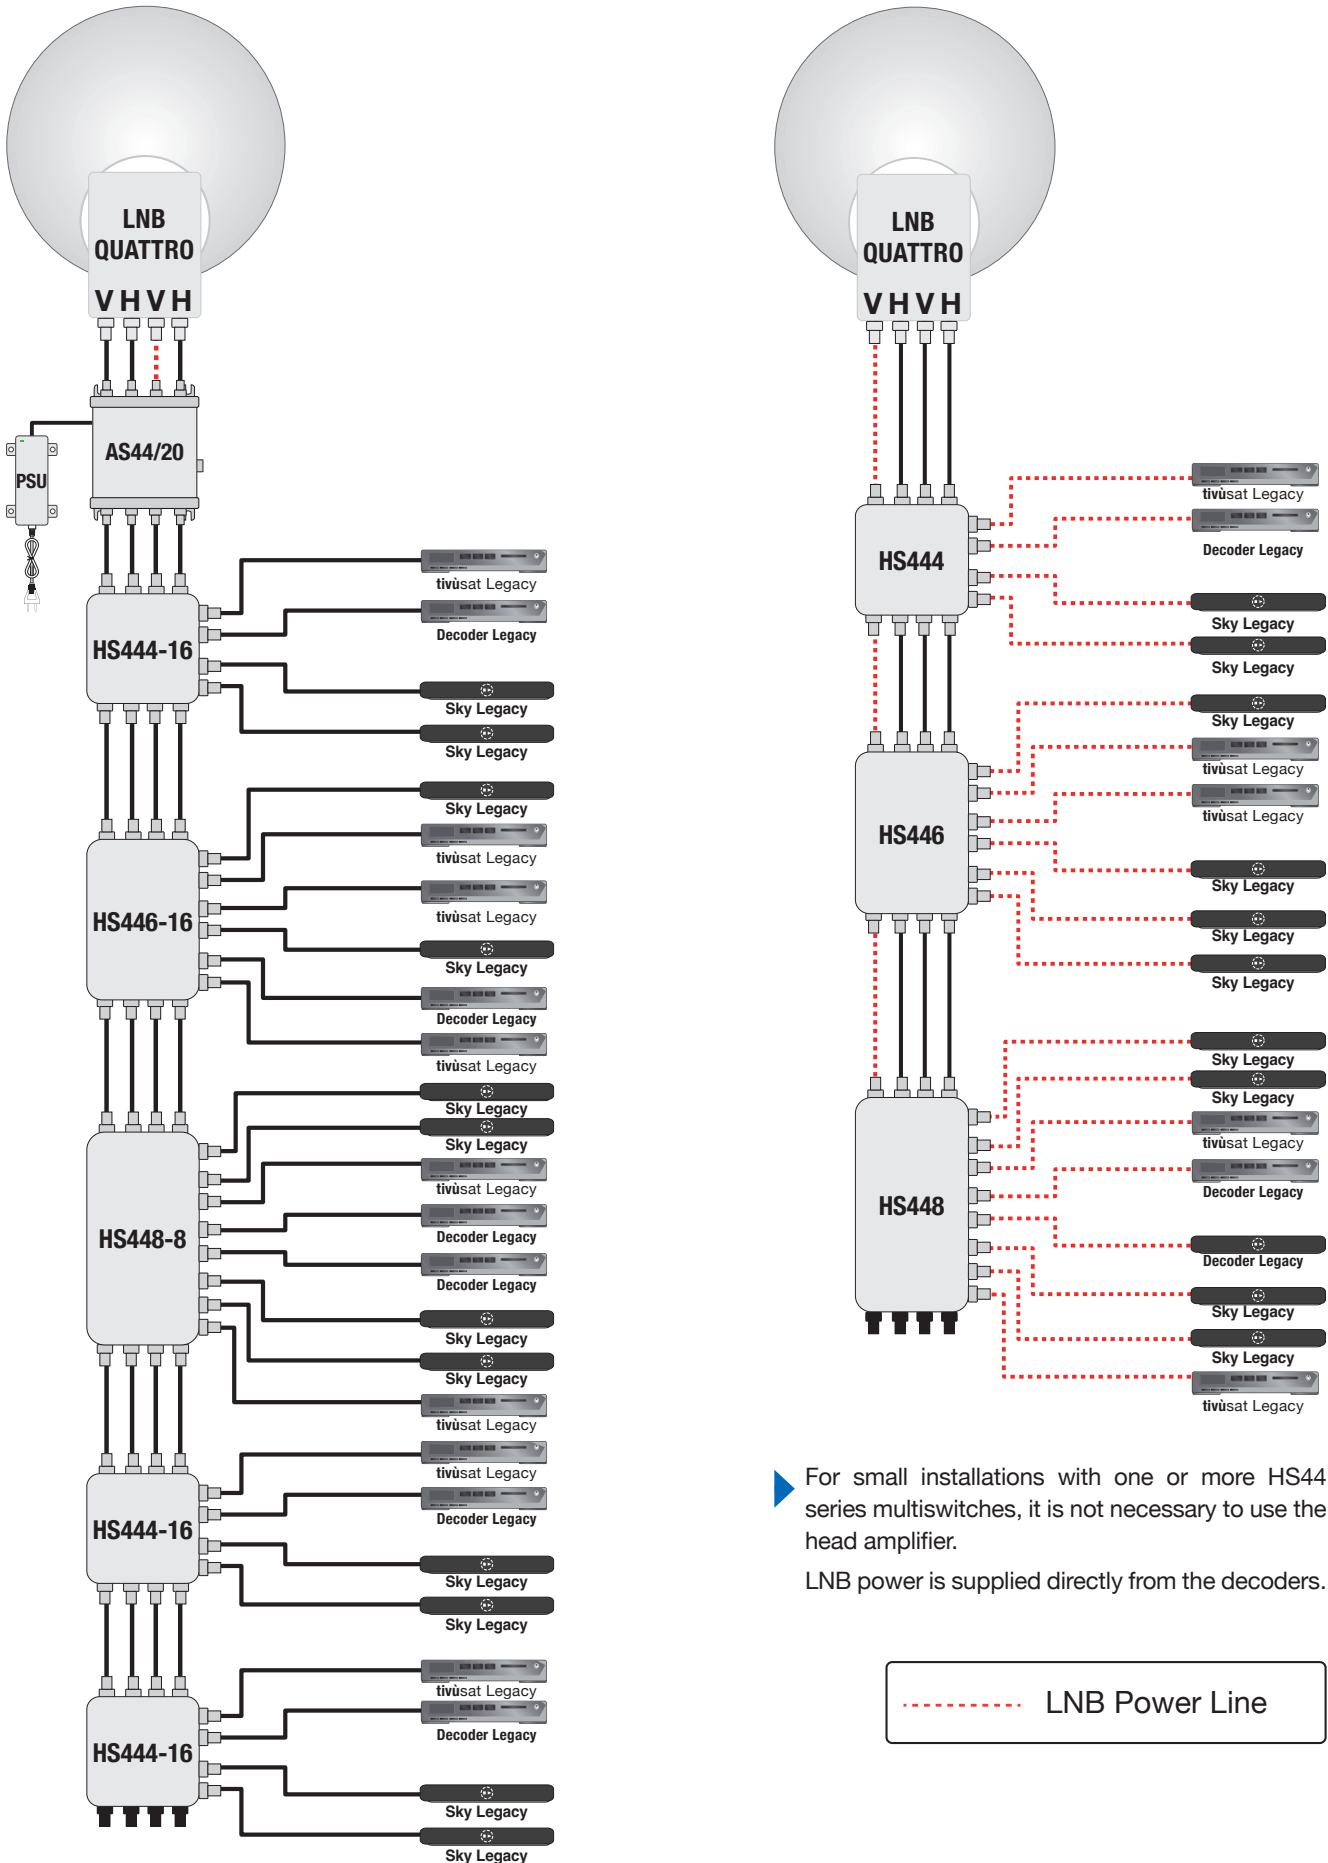

▶ For small installations with one or more HS44 series multiswitches, it is not necessary to use the head amplifier.

LNB power is supplied directly from the decoders.

--- LNB Power Line

