





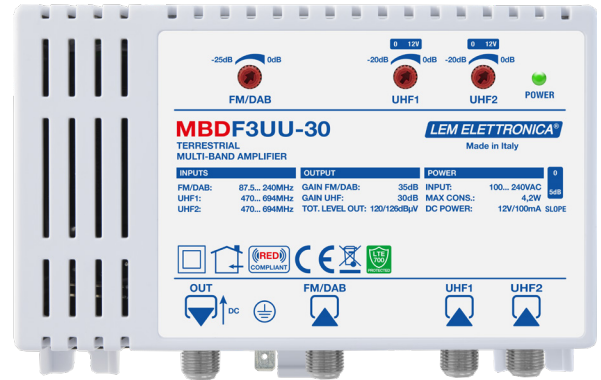


MBDF3UU-30

-  **Integrated 5G/4G filter**
-  **High-efficiency switching power supply**
-  **PIN diode input attenuators**
-  **Slope selector 0/5dB**
-  **Wall or DIN rail mounting**
-  **ABS enclosure class V0**



Multi-input indoor self-powered TV amplifier with low noise figure amplification. 3 inputs with adjustable gain and **self-restoring short-circuit protected tele powering**. Slope management of the output response curve.

The external dimensions of the MBD amplifiers are also suitable for installation in wall-mounted junction boxes.



MODEL		MBDF3UU-30
N° INPUTS		3
INPUTS		FM/DAB - UHF - UHF
INPUT FM/DAB	MHz	87.5... 240
INPUT UHF1	MHz	470... 694
INPUT UHF2	MHz	470... 694
LTE PROTECTION		LTE 700 (4G+5G)
GAIN FM/DAB	dB	35 (Adjustable 0... -25)
GAIN UHF1	dB	30 (Adjustable 0... -20)
GAIN UHF2	dB	30 (Adjustable 0... -20)
SLOPE SELECTOR	dB	0/+5
TOTAL MAXIMUM OUTPUT LEVEL DIN45004B	dB μ V	120
TOTAL MAXIMUM OUTPUT LEVEL IM3 -35dBc	dB μ V	126
NOISE FIGURE	dB	7
INPUT / OUTPUT RETURN LOSS	dB	>12
TOTAL INPUTS POWER SUPPLY		12V/ 100mA
POWERING RANGE		100... 240VAC 50/60Hz
MAXIMUM CONSUMPTION (w/o remote power supply)	W	3
MAXIMUM CONSUMPTION (with remote power supply)	W	4,2
OPERATING TEMPERATURE	°C	-10... +55
DIMENSIONS	mm	135 x 91 x 45

LEM ELETTRONICA srl

Via Grezze, 38 - 25015 Desenzano d/G Italy Tel. +39 0309120006 info@lemelettronica.it

